


# LUZ-P12 101.840.BW/DALI-ST

LUZ | Pendant (1xLED 12W 840/4000K 1710lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

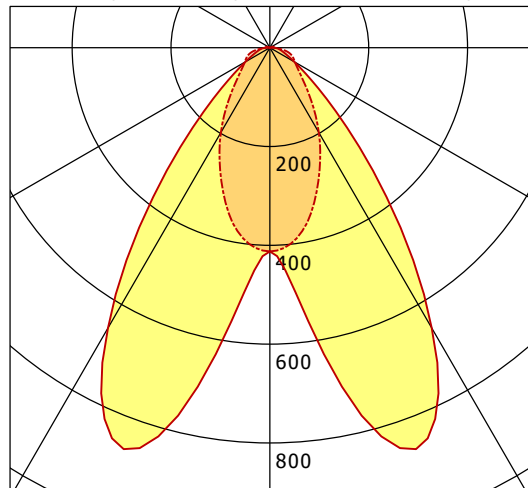

|              | C0  | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0°           | 412 | 412 | 412  | 412  |
| 15°          | 795 | 335 | 795  | 335  |
| 30°          | 655 | 198 | 655  | 198  |
| 45°          | 204 | 97  | 204  | 97   |
| 60°          | 57  | 59  | 57   | 59   |
| 75°          | 25  | 41  | 25   | 41   |
| 90°          | 10  | 3   | 10   | 3    |
| cd / 1000 lm |     |     |      |      |

LDC unsuitable for cone representation.  
The C90 angle is oversized.

|                    |                 |
|--------------------|-----------------|
| <b>η</b>           | LED             |
| Efficiency         | 143 lm/W        |
| Direct/Indirect    | ↓ 99% / ↑ 1%    |
| System Power       | 12 W            |
| <b>UGR</b>         | X=4H, Y=8H      |
| Reflection factors | 70/50/20        |
| UGR C0/C180        | 20.2            |
| UGR C90/C270       | 21.7            |
| CIE Flux Codes     | 72 90 97 99 100 |
| Ra/CRI             | > 80            |