


**Special features**

- Flicker-free
- Secured against short circuits and overloads

Housing Material	Plastic
Housing Color	Black
Operating Mode	Constant voltage
Protection Class	Protection class II/protective insulation
Power	4 W
Output Voltage	12 V/DC
Output Current	0-330 mA
Power Factor	0.55
Connection Type	Open cables
Primary Connection	With free strand / conductor ends
Secondary Connection	Open cables
Number of Circuit Breaker B10A max.	17
Number of Circuit Breaker B16A max.	28
Number of Circuit Breaker C10A max.	37
Number of Circuit Breaker C16A max.	59
Inrush Current max.	5 A / 260 µs
Reference Point Tc	80 °C
Working Temperature	-20 to 50 °C
Storage Temperature	-20 to 70 °C
IP Protection Class	IP 65
Switching Cycles	100000
Life Time	50000 h
Length	53 mm
Width	27 mm
Height	21 mm
Product weight	45 g

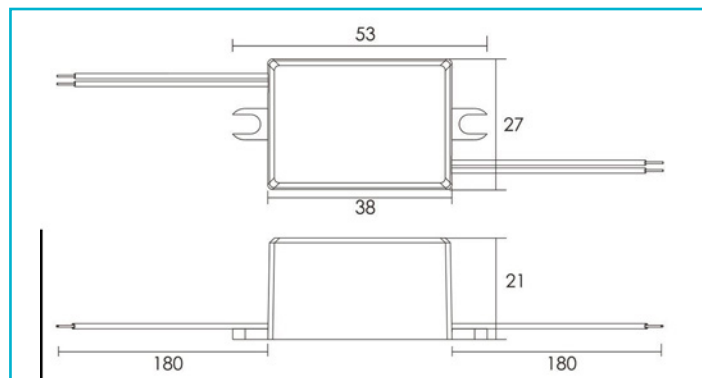