
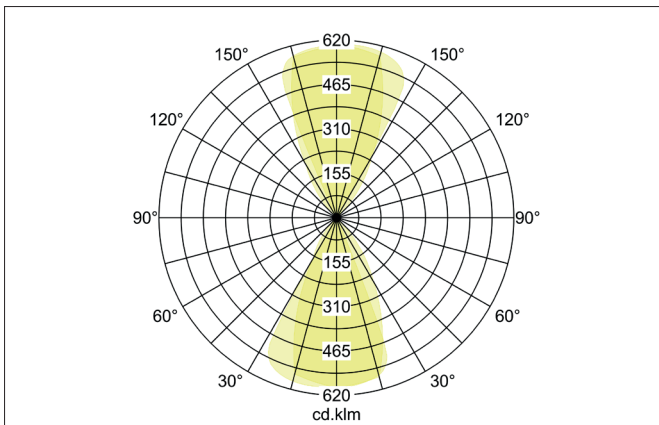


MARIBO LED wall surface mounted luminaire, IP54
Article no. 60110103

Light.
For Generations.

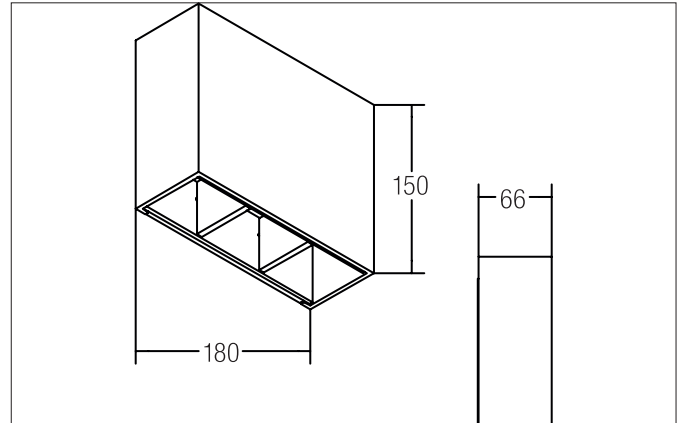

Tender

LED wall surface mounted luminaire, IP54, Rectangular. Ceiling cut-out Installation depth mm, Length 180 mm, Width 66 mm, Weight 1,835 kg, with rotationssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a glass transparent cover. Luminous flux 424 lm, Power 2 x 7,4 W, Light colour warm white, Correlated color temperature (CCT) 3.000 K, Colour rendering index CRI > 90, Housing material: Aluminium / Glass, Colour: Graphite, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP54, .With electronic driver, on/off switchable.

| Article data | |
|-------------------|--|
| Article no. | 60110103 |
| GTIN | 4251433915416 |
| Series name | MARIBO |
| Short description | LED wall surface mounted luminaire, IP54 |
| Material | Aluminium / Glass |
| Colour | Graphite |
| Type of surface | Matt |
| Shape | Rectangular |
| Length | 180 mm |
| Width | 66 mm |
| Height | 150 mm |
| Scope of delivery | Incl. built-in 230 V power supply, not dimmable. |
| Weight | 1.835 kg |

MARIBO LED wall surface mounted luminaire, IP54

Article no. 60110103

Light.
For Generations.

| Lighting technology | |
|---------------------|-----------------|
| Colour temperature | 3.000 K |
| Light colour | White |
| Light output | Direct/Indirect |
| Luminous flux | 424 lm |
| System efficiency | 57 lm/W |
| Colour rendering | CRI > 90 |
| Beam angle | 100° |
| Light sharing | Symmetric |

| Operating technology of the luminaire | |
|---------------------------------------|--|
| System output | 6 W |
| Voltage type | AC |
| AC nominal voltage max | 230 V |
| Frequenz max. | 50 Hz |
| Lamp | LED |
| Protection class | I |
| Degree of protection | IP54 |
| Control | on/off |
| Bulb change possible | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |

| Mounting technology | |
|-----------------------------|-------------------|
| Mounting method | Surface mounting |
| Place of installation | Wall-mounted |
| Adjustability | Not adjustable |
| Material cover | Glass transparent |
| Suitable for through-wiring | No |

| Packing data | |
|-------------------------|---|
| Gross weight | 2.024 kg |
| Length of packaging | 200 mm |
| Packaging width | 80 mm |
| Packaging height | 240 mm |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |