


LUZ-D14 103.840.AS/DALI

LUZ | Pendant (1xLED 22W 840/4000K 3380lm)

— C0/C180 cd / 1000 lm - - - C90/C270

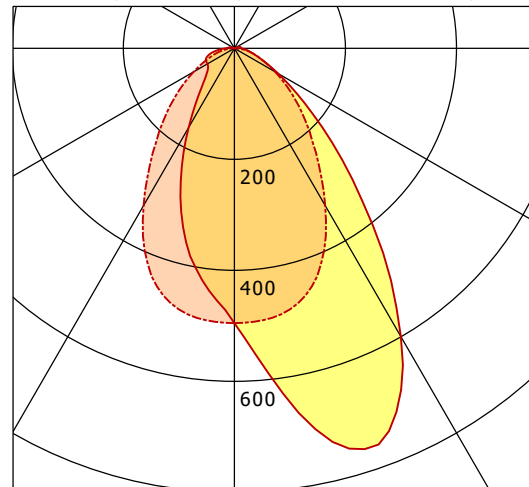

| | C0 | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0° | 495 | 495 | 495 | 495 |
| 15° | 742 | 469 | 348 | 469 |
| 30° | 600 | 327 | 165 | 327 |
| 45° | 262 | 178 | 73 | 178 |
| 60° | 91 | 85 | 56 | 85 |
| 75° | 34 | 33 | 49 | 33 |
| 90° | 13 | 1 | 15 | 1 |
| cd / 1000 lm | | | | |

LDC unsuitable for cone representation.
Asymmetric LDC.

| | |
|--------------------|-----------------|
| η | LED |
| Efficiency | 154 lm/W |
| Direct/Indirect | ↓ 99% / ↑ 1% |
| System Power | 22 W |
| UGR | X=4H, Y=8H |
| Reflection factors | 70/50/20 |
| UGR C0/C180 | 22.6 |
| UGR C90/C270 | 22.2 |
| CIE Flux Codes | 65 88 97 99 100 |
| Ra/CRI | > 80 |