
Art. no. 348146

Surface-mounted ceiling light Altais Motion, 25 W, 3000/4000/6000 K, white





It takes a lot to catch the Altais series off guard. Thanks to IP54 and impact strength class IK10, these slender outdoor lights are impressive all rounders both in a commercial and private setting. The Altais lights offer additional flexibility with their integrated movement sensor [programmable using remote control] and the adjustable light colour for different lighting scenarios.

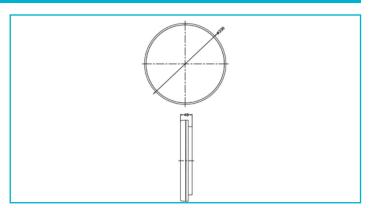

Special features

- Light colour adjustable in 3 stages ٠
- High impact resistance • •
 - Splash water protected

Housing Material	Plastic	Switching Cycles	75000
Housing Color	White	Power Consumption Energy Efficiency Class	25 kWh/1000h D
Protection Class	Protection class II/protective insulation		
Rated Input	25 W		
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz		
Power Supply Unit incl.	Yes		
Connection Type	Clamp		
Dimmable	No		
Motion Detector	Yes		
Kind of Motion Detector	High frequency		
Detection Distance	1-12 m		
Angle of Detection	150 Degree		
Light Source	LED, Light source not changeable		
Color Temperature	3000/4000/6000 K		
Colour Consistency	6 SDCM		
Colour Rendering Index (Ra)	85		
Rated Luminous Flux	2715 lm		
Rated Angle of Reflection	120 Degree		
Distribution Characteristic 120°	NDLS		
Light Exit Surfaces	1		
Light characteristics	Direct		
Light direction	Below		
Height	48 mm		
Diameter	330 mm		
Working Temperature	-40 to 50 °C		
IP Protection Class	IP 54		
IK Protection Class	IK10		
Life Time L70 / B50	50000 h		

Deko-Light Elektronik-Vertriebs GmbH Auf der Hub 2 | D-76307 Karlsbad www.deko-light.com deko@deko-light.com