


# PLL 25.385.30.2/DALI


PL 25 (1xLED 22W 830/3000K 1300lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

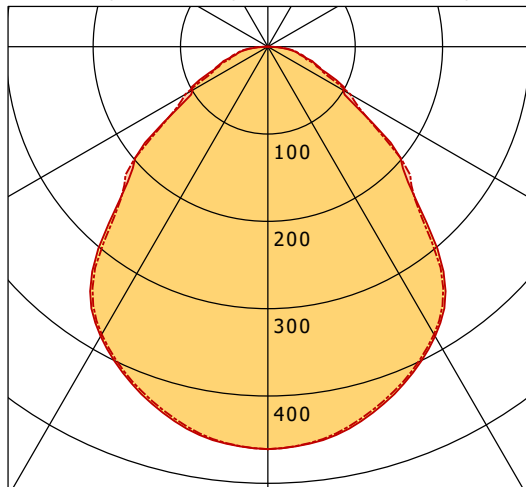

	C0	C90	C180	C270
0°	461	461	461	461
15°	439	436	439	436
30°	383	380	383	380
45°	233	234	233	234
60°	100	109	100	109
75°	40	43	40	43
90°	2	2	2	2
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

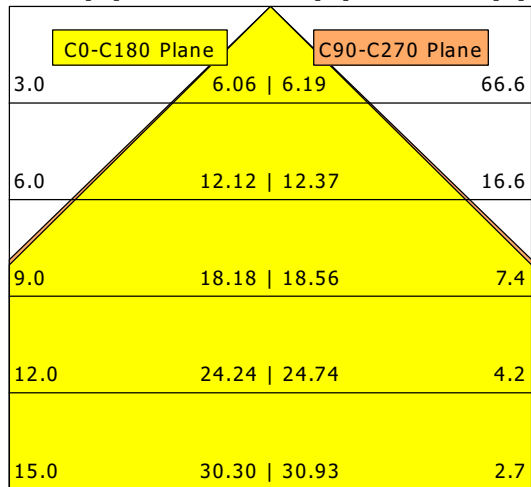

<b>η</b>	LED
Efficiency	59 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	22 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.7
UGR C90/C270	18.8
CIE Flux Codes	60 87 97 100 100
Ra/CRI	>80