


# BIXXL 204.30.15.2/DALI-ST

Bixxl 200 (1xLED 41W 830/3000K 4280lm 15 °)

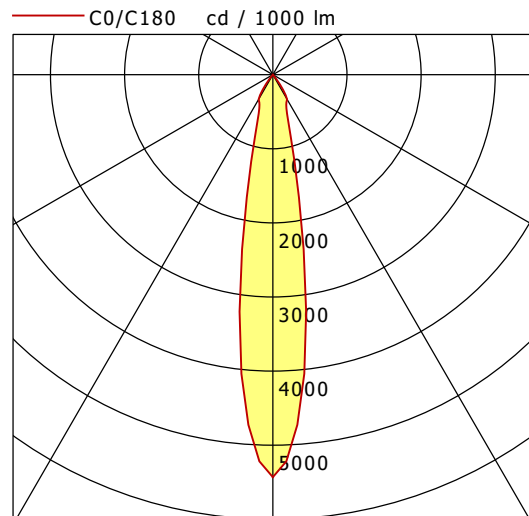

	C0	C90	C180	C270
0°	5431	5431	5431	5431
15°	1027	1027	1027	1027
30°	382	382	382	382
45°	5	5	5	5
60°	3	3	3	3
75°	2	2	2	2
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	Cone width [m]	Illuminance [lx]
<b>C0-C180 Plane</b>		
3.0	0.97	2582.7
6.0	1.95	645.7
9.0	2.92	287.0
12.0	3.90	161.4
15.0	4.87	103.3

<b>η</b>	LED
Efficiency	105 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	41 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.0
UGR C90/C270	18.0
CIE Flux Codes	99 99 100 100 100
Ra/CRI	> 80