

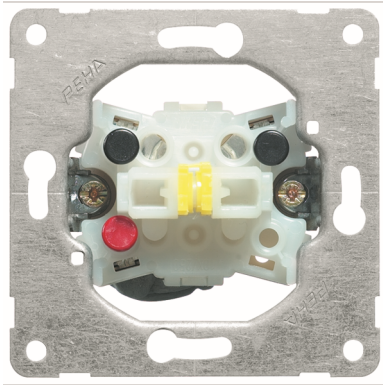



Rocker switch, series bridged

Product Data Sheet



Number of rockers	2
Switching current for fluorescent lamps	6Fluorescent lamp rated current
Nominal voltage	250Volt
Method of operation	Rocker/button
Mounting method	Flush mounted (plaster)
Material	Other
Surface protection	Untreated
Colour	Other
Suitable for degree of protection (IP)	IP20



Rocker switch, series bridged

Rocker series bridged switch for all flush-mounted programmes 10 A 250 V~ On/off or off/on function (opposing)

Material No.	Article No.	EAN-code
00190321	D 515/1	4010105190328

PEHA Elektro GmbH & Co.KG

a Honeywell Company
Daimlerstraße 4
58553 HALVER
DEUTSCHLAND

Tel.: 02353 9118 001
Fax: 02353 9118 311
mail: peha@honeywell.com
www.peha.de

Änderungen vorbehalten. © Honeywell PEHA