


RESCUE TWO Exit sign luminaire
Article no. 79231264

Light.
For Generations.

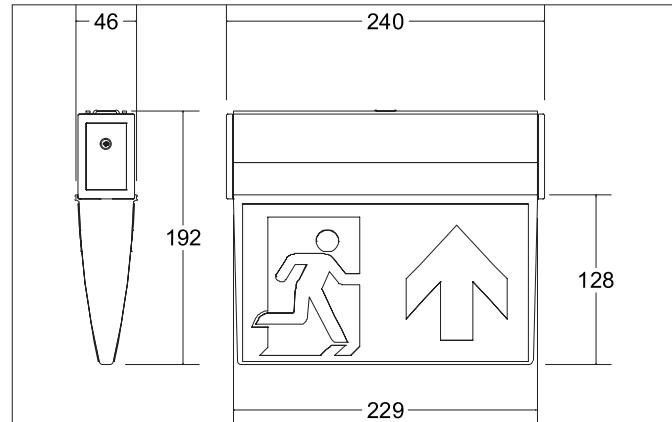

Tender

Exit sign luminaire, silver. Surface mounting, Ceiling-/Wall-mounted Escape sign light, recognition range 25 m, nominal operating time 3 h, nominal operating time can be changed to 8 h, then the emergency lighting factor (BLF) is only 40 %, ceiling or wall mounting, incl. LiFePO4 single battery and pictogram set Automatic self-test due to integrated rechargeable battery. Lamp holder: Without fitting, Mounting method: Surface mounting, Place of installation: Ceiling-/Wall-mounted, Material: Aluminium / Polycarbonate, Degree of protection: according to DIN EN 60529 IP41, Protection class: (EN 61140) I, Voltage: 230V AC 50Hz, Power: 4.6W, Colour temperature: 4.000 K, Light colour : White, Adjustability: Not adjustable, With control gear: Yes.

Article data	
Article no.	79231264
GTIN	4251433949510
Series name	RESCUE TWO
Short description	Exit sign luminaire
Material	Aluminium / Polycarbonate
Colour	Silver
Length	240 mm
Width	46 mm
Height	192 mm
Weight	0.681 kg

Lighting technology	
Colour temperature	4000 K
Light colour	White
System efficiency	5 lm/W

RESCUE TWO Exit sign luminaire
Article no. 79231264

Light.
For Generations.

Operating technology of the luminaire	
System output	4.6 W
Voltage type	AC
AC nominal voltage max	230 V
Frequenz max.	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP41
Ambient temperature	+5 bis +45°C
Bulb change possible	Yes

Operating technology of emergency light	
Recognition distance	25 m
Battery type	LiFePO4
Function	Escape route signage
Type of marking	Double-sided
Electric feeding	Decentralised (single battery)
Nominal operating time at BLF 100 %	3 h
Nominal operating time at BLF 40 %	8 h
Rated operating time	switchable
Monitoring device	Automatic self-test

Mounting technology	
Mounting method	Surface mounting
Place of installation	Ceiling-/Wall-mounted
Adjustability	Not adjustable
Material cover	Plastic, opal

Packing data	
Gross weight	0.831 kg
Length of packaging	272 mm
Packaging width	215 mm
Packaging height	57 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>

RESCUE TWO Exit sign luminaire
Article no. 79231264

Light.
For Generations.

Accessories	
	Article no.: 81170030 RESCUE TWO central pendulum set for 79230. / 79231..., length 300 mm Abmessung: 300 mm
	Article no.: 81170050 RESCUE TWO central pendulum set for 79230. / 79231..., length 500 mm Abmessung: 500 mm
	Article no.: 81170100 RESCUE TWO central pendulum set for 79230. / 79231..., length 1,000 mm Abmessung: 1,000 mm
	Article no.: 81171000 RESCUE TWO ceiling recessed set for 79231264 Abmessung: 310 mm