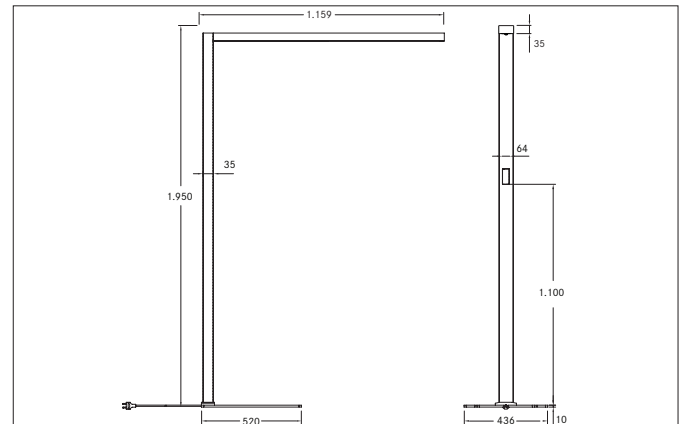


**BEVON LED floor luminaire, microprismatic cover, with indirect light component**

Article no. 77451694

Light.  
For Generations.**Tender**

LED floor luminaire, microprismatic cover, with indirect light component, Rectangular. Ceiling cut-out Installation depth mm, Length 1.203 mm, Width 75 mm, Weight 14,000 kg, with rotationssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a plastic, opal cover. Luminous flux 7.200 lm, Power 2 x 60 W, Light colour neutral white, Correlated color temperature (CCT) 4.000 K, Colour rendering index CRI > 80, Housing material: Aluminium / Steel / Plastic, Colour: Silver structure, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP20, .With electronic driver, Presence detector dimmable.

Article data	
Article no.	77451694
GTIN	4251433983033
Series name	BEVON
Short description	LED floor luminaire, microprismatic cover, with indirect light component
Material	Aluminium / Steel / Plastic
Colour	Silver
Type of surface	Structure
Shape	Rectangular
Length	1,203 mm
Width	75 mm
Height	1950 mm
Scope of delivery	Delivery: incl. supply line 2500 mm with protective contact angle plug</P></TEXT>.
Weight	14.000 kg

**BEVON LED floor luminaire, microprismatic cover, with indirect light component**

Article no. 77451694

Light.  
For Generations.

Lighting technology	
Colour temperature	4.000 K
Light colour	White
Light output	Direct/Indirect
Luminous flux	7,200 lm
System efficiency	120 lm/W
Colour rendering	CRI > 80
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	60 W
Voltage type	AC
AC nominal voltage max	230 V
Frequenz max.	50 Hz
Lamp	LED exchangeable
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP20
Control	Presence detector, Daylight detector, Button
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.

Mounting technology	
Mounting method	Surface mounting
Place of installation	Floor-mounted
Adjustability	Not adjustable
Material cover	Plastic, opal

Packing data	
Gross weight	16 kg
Length of packaging	2,300 mm
Packaging width	310 mm
Packaging height	110 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.