

Basic-X1

Surface mounted luminaire - Direct/indirect light distribution

Article code: BX1ASE-840M-D400



Illustrations may only be similar and serve as an orientation.



Basic-X1. LED. Wall or ceiling mounted luminaire. Luminaire body with distance-spacer. Luminaire body made of high-quality aluminum profile. Surface finish Radiant Silver. Direct light distribution and indirect lighting corona. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR<= 19. Switchable. DxH (round). D=400mm. H=55+

25mm. Medium-power current. 5740lm. 38W. 3,6kg. Binning initial <= MacAdam 3. IP40. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

Basic-X1

Surface mounted luminaire - Direct/indirect light distribution

Article code: BX1ASE-840M-D400

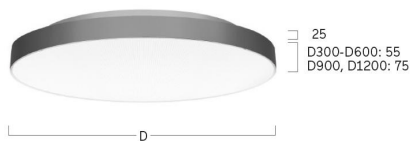

Customer / Project: _____

Note: _____

| | |
|------------------------------|------------------------------------|
| Productname | Basic-X1 |
| Lamp | LED |
| Installation Type | Surface mounted luminaire |
| Surface finish | Radiant Silver |
| Light characteristics | Direct/indirect light distribution |
| Colour temperature | 4000K |
| Colour Rendering Index (CRI) | CRI>80 |
| Optical system | Microprismatic screen |
| Control | Switchable |
| Length L/Diameter D (mm) | D=400mm |
| Height H (mm) | H=55+25mm |
| Current/Power | Medium-Power |
| Luminous Flux | 5740lm |
| Power consumption | 38W |
| Degree of protection | IP40 |
| Certification | Prüfzeichen: ENEC |
| LED lifetime | L85B10 (tq 25°C) = 50.000h |
| UGR | UGR≤ 19 |
| Photometric code | 8 40 / 3 3 9 |
| Photobiological class | RG0 (EN62471) |
| Indoor/Outdoor | Indoor: ta [ambient] max. 25°C |
| Weight (kg) | 3,6kg |

