


AX0 Cat 6 Shielded Jack

APPLICATION

The AX0 Cat 6 shielded jack supports 1000BASE-T networks and is ideal for applications where excellent protection from EMI/RFI (electromagnetic interference/radio frequency interference) is required and advanced network security is desired. The jack is designed to be used with a variety of Leviton modular panels, wallplates, surface-mount boxes, and QUICKPORT™ compatible products.

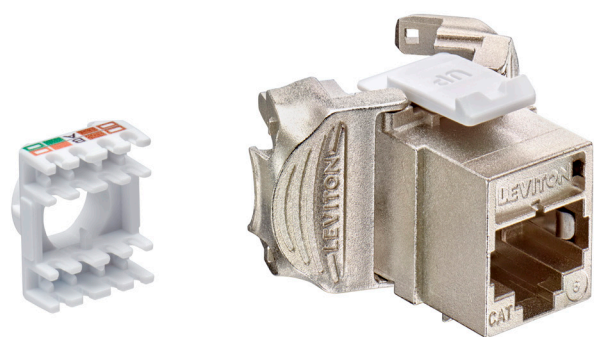

SPECIFICATION

The jack shall meet the requirements for channel and component-level electrical transmission performance as described in ANSI/TIA-568.2-D (Cat 6), ISO/IEC 11801-1 (Class E), and EN 50173-1 (Class E). The jack shall be compliant with ANSI/TIA-1096-A, c(UL)us Listed, and be independently verified for electrical transmission performance and power delivery. The jack shall be made of die-cast zinc housing to protect from potential EMI/RFI and shall provide 360-degree screen contact. The jack shall support tool-free termination and re-termination and shall not require a specialized termination tool. The modular jack shall fit in a variety of telecommunications wallplates, outlets, and field-configurable patch panels and patch blocks. The jack wiring shall be universal to accommodate T568A and T568B wiring schemes. The jack shall be compatible with interchangeable icons. The jack shall be compliant with IEEE 802.3 PoE Type 1, 2, 3, 4 (100 watts max).

WARRANTY INFORMATION

For Leviton product warranties, go to Leviton.com/ns/support

FEATURES & BENEFITS

- Independently tested and guaranteed to meet component performance
- 360-degree screen provides EMI/RFI protection and signal isolation
- Supports tool-free termination/re-termination and requires no specialized termination tool
- Supports a wider range of applications (e.g. shallow boxes, enclosures, and bend radius)
- Terminates from 26- to 22-AWG solid or stranded conductors for use on various cable types
- Withstands 20 re-termination cycles
- Jack contacts are tested for 750 plug-mating cycles to ensure system longevity
- Compatible with interchangeable icons
- Compatible with QUICKPORT™ modular panels, wallplates, and surface-mount boxes

STANDARDS & REGULATIONS

- ANSI/TIA-568.2-D (Cat 6)
- ISO/IEC 11801-1 (Cat 6)
- EN 50173-1 (Cat 6)
- EN 50174-2
- ANSI/TIA-1096-A (formerly FCC Part 68)
- IEC 60603-7 (includes IEC 60512-5-2)
- IEC 60512-99-002
- IEEE 802.3 PoE Type 1, 2, 3, 4 (100 watts max)
- Cisco UPOE, UPOE+ (90 watts max)
- Power over HDBaseT™ PoH (95 watts max)
- c(UL)us Listed (UL1863)
- RoHS 3

MECHANICAL SPECIFICATIONS

Dimensions: See Page 2

Materials: **Jack Body:** Die-cast zinc

Spring-Wire Contacts:

High-quality, copper-based alloy (phosphor bronze), plated with 50 microinches of gold over nickel plating for lowest contact resistance and maximum life

Temp. (Storage): -40 °C to +70 °C (-40 °F to +158 °F)

Temp. (Installation): Refer to cable installation temperature


Temp. (Operating): -10 °C to +60 °C (-14 °F to +140 °F)

Humidity (Max.): 95% relative humidity, non-condensing

PRODUCT SPECIFICATIONS

AX61S-GS6

AX61S-GS6

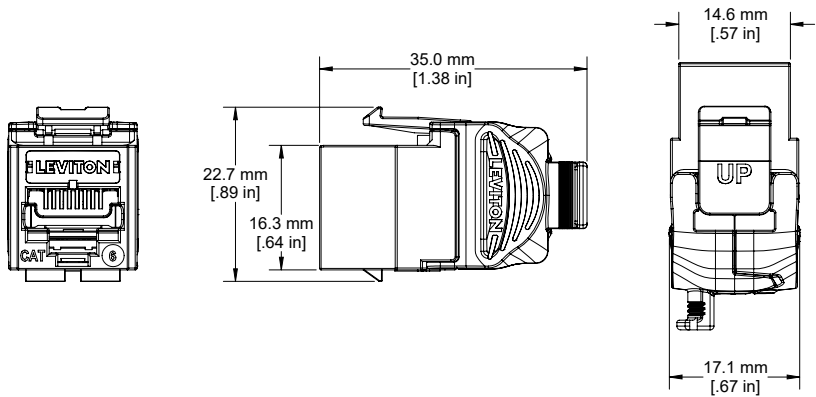

PART NUMBER	
Description	Part No.
AX0 Cat 6 Shielded Jack	AX61S-GS6

Icons (ICONS-ICx) can be ordered separately in 72-quantity packs.
x = icon color



For further support information, visit [Leviton.com/ns/support](https://leviton.com/ns/support)

USA Network Solutions Headquarters +1 (800) 722 2082 infoUSA@leviton.com Leviton Cable (formerly Berk-Tek) +1 (800) 237 5835 infoUSA@leviton.com	Asia Pacific +852 3620 2602 infoAPAC@leviton.com	Canada +1 (800) 461 2002 infoCanada@leviton.com	Europe +44 (0) 1592 772124 infoEurope@leviton.com	Latin America MX: +52 (55) 2128 6286 LATAM: +52 (55) 2333 5963 infoLATAM@leviton.com	Middle East & Africa +971 (4) 247 9800 infoMEA@leviton.com
NETWORK SOLUTIONS PRODUCTS ARE AVAILABLE WORLDWIDE IN OVER 100 COUNTRIES. VISIT US ONLINE AT LEVITON.COM/NS TO LEARN MORE.					