

Basic-G1

Pendant luminaire - Direct light distribution

Article code: BG1ASE-840E-D900-U



Illustrations may only be similar and serve as an orientation.



Basic-G1. LED. Pendant luminaire. Luminaire body made of high-quality aluminum profile. Surface finish Radiant Silver. Direct only light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR<=19. Switchable. DxH (round). D=900mm. H=75mm. Central cord suspension with ceiling rose and power supply cable (Set). Pendant length max 1500mm. Power supply: transparent. Ceiling



rose: Matching luminaire's surface colour. Low-power current. 7920lm. 56W. 12,6kg. Binning initial <= MacAdam 3. IP40. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,2%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L90B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 and 50001:2018 certified.

lightnet

Basic-G1

Pendant luminaire - Direct light distribution

Article code: BG1ASE-840E-D900-U

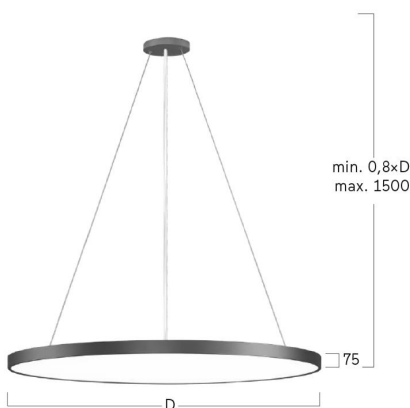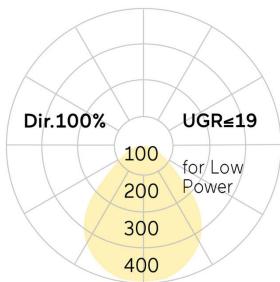

Customer / Project: _____

Note: _____

| | |
|------------------------------|---|
| Productname | Basic-G1 |
| Lamp | LED |
| Installation Type | Pendant luminaire |
| Surface finish | Radiant Silver |
| Light characteristics | Direct light distribution |
| Colour temperature | 4000K |
| Colour Rendering Index (CRI) | CRI>80 |
| Optical system | Microprismatic screen |
| Control | Switchable |
| Length L/Diameter D (mm) | D=900mm |
| Height H (mm) | H=75mm |
| Current/Power | Low-Power |
| Luminous Flux | 7920lm |
| Power consumption | 56W |
| Suspension | Central susp. (Set) |
| Ceiling rose colour | Ceiling rose: Matching luminaire`s surface colour |
| Pendant length (mm) | Pendant length max 1500mm |
| Degree of protection | IP40 |
| Certification | Prüfzeichen: ENEC |
| Cable Colour | Power supply: transparent |
| LED lifetime | L90B10 (tq 25°C) = 50.000h |
| UGR | UGR<=19 |
| Photometric code | 8 40 / 3 3 9 |
| Photobiological class | RG0 (EN62471) |
| Indoor/Outdoor | Indoor: ta [ambient] max. 25°C |
| Weight (kg) | 12,6kg |

