


LED recessed spotlight CORE
Artikel-Nr. 88673173

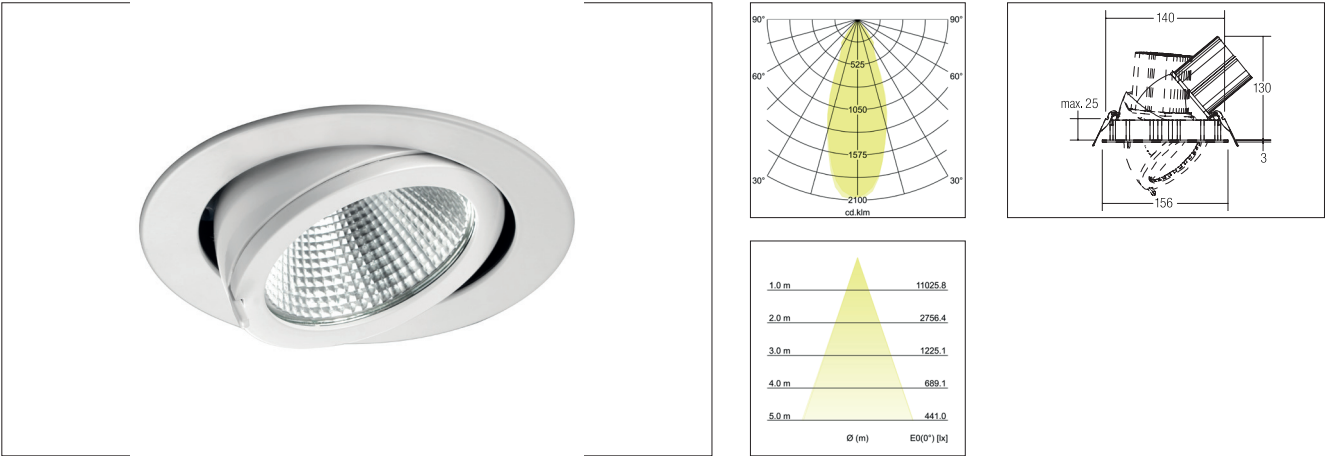

LED recessed spotlight CORE, white, round. In a compact design, for installation in tool-less rapid assembly systems. Including a light source: 1 x LED COB, power of LED: 25.3 W, system power: 28.9 W, heat dissipation: passive (without a fan), material: aluminum / glass, rotation angle: can be rotated/swiveled, dimensions of lamp: Ø 156 mm x 130 mm, weight: 1.0 kg, mechanical installation depth of 95 mm - 130 mm depending on the swiveling angle (45° - 0°). Including an driver, on/off switchable (dimensions: L 108 x W 68 x H 32 mm), power factor > 0.9 (230 V AC 50 Hz) Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Glass / Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 32W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 2.800lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 38°, Adjustability: Rotable and pivoted, With control gear: Yes, Control: on/off.

Artikel-Nr.	88673173
Stand:	26.10.2021 04:21

Beam angle	38 °
Colour temperature	3000 K
Colour	weiß
Luminous flux	2,800 lm
System efficiency	88 lm/W
Beam angle	38 °
Material	Aluminium / Glass / Plastic
Colour rendering	CRI > 80
Power	32 W
weight	0.925 kg

System output	32 W
Control	on/off
Built-in diameter	140 mm
Installation depth	130 mm
Voltage	230V AC 50Hz
Circuit type	Parallel conduction
Degree of protection	IP20
Protection class	II
Voltage type	AC
Adjustability	Rotable and pivoted

Alle technischen Daten wie Lichttechnische-, Gewichts- und Maßangaben basieren auf Bemessungswerten und sind sorgfältig erstellt. Die mögliche Toleranz der Farbtemperatur beträgt +/- 150K. Die Leistung und Lichtstrom unterliegen initial einer Toleranz von +/- 10%.Die Werte gelten, wenn nicht anders beschrieben, für eine Umgebungstemperatur von 25°C. Technische Änderungen und Irrtümer vorbehalten. Alle Preisangaben verstehen sich als (UVP) in Euro ohne MwSt. Bestellung erfolgt zu unseren Allgemeinen Verkaufsbedingungen unter www.brumberg.com/de/agb/allgemeine-verkaufsbedingungen/.