

# lightnet

## Cubic-F1

Free standing luminaire - Direct/indirect light distribution

Article code: CF1ABX-835H-L900-U-A



Illustrations may only be similar and serve as an orientation.



Cubic-F1. LED. Free standing luminaire. Luminaire head with 25mm minimalist overall height. Luminaire body made of high-quality aluminum profile. Surface finish Jet Black. Direct/indirect light distribution. Colour temperature: 3500K (Neutral White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR<=19. Separate stepless dimming of the direct/indirect light chambers. LxWxH (luminaire head, rectangular/Stand). L=900mm. W=



200mm. H=2000/25mm. High-power current. 16000lm. 114W. 20,1kg. Binning initial <= MacAdam 3. U-formed floor base matching luminaire`s outer surface colour. Plug Schuko CEE 7/7 (Type E+F). IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 and 50001:2018 certified.

# lightnet

## Cubic-F1

Free standing luminaire - Direct/indirect light distribution

Article code: CF1ABX-835H-L900-U-A

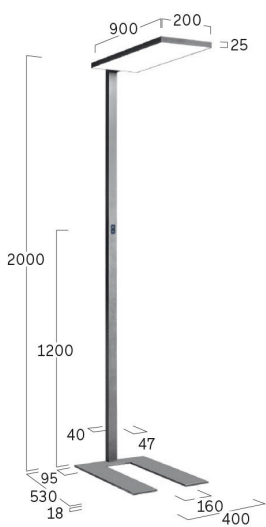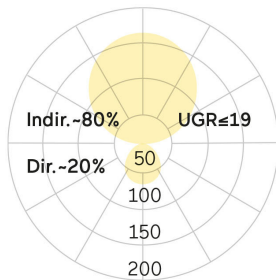

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Cubic-F1
Lamp	LED
Installation Type	Free standing luminaire
Surface finish	Jet Black
Light characteristics	Direct/indirect light distribution
Colour temperature	3500K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Control	Separately stepless dimmable
Length L/Diameter D (mm)	L=900mm
Width W (mm)	W=200mm
Height H (mm)	H=2000/25mm
Current/Power	High-Power
Luminous Flux	16000lm
Power consumption	114W
Base-Type	U-base
Plug	Schuko CEE 7/7 (E+F)
Degree of protection	IP20
LED lifetime	L80B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 35 / 3 3 9
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	20,1kg

