


## Ringo Star-G5

Pendant luminaire - Direct light distribution

Article code: RG5LBL-840H-D370-PB-BP

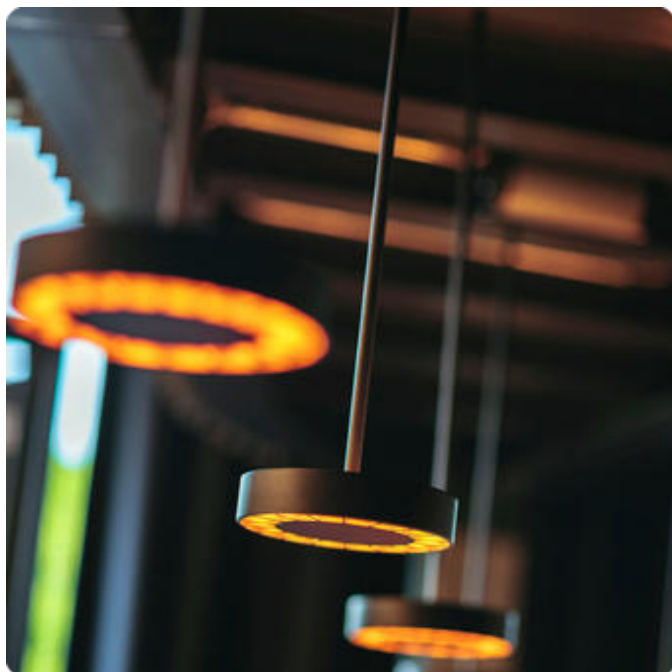

Illustrations may only be similar and serve as an orientation.


Ringo Star-G5. LED. Pendant luminaire. Luminaire body made of aluminium profile with 40mm profile width. Surface finish Jet Black. Direct only light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Lens Louvre: precision lenses with louvre for wide and symmetrical light distribution. High glare limitation, compatible for office applications. UGR<=19. Reflector: Jet Black. Blind Plate. Dimmable DALI. DxHxW (round). D=370mm. W=40mm. H=40mm. Rod suspension

with ceiling rose (Set). Pendant length on request. Ceiling rose: Matching luminaire's surface colour. High-power current. 4140lm. 34W. 4kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 and 50001:2018 certified.

## Ringo Star-G5

Pendant luminaire - Direct light distribution

Article code: RG5LBL-840H-D370-PB-BP



Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Ringo Star-G5
Lamp	LED
Installation Type	Pendant luminaire
Surface finish	Jet Black
Light characteristics	Direct light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Lens Louvre
Reflector Colour Inside	Reflector: Jet Black
Central Module	Blind Plate
Control	Dimmable (DALI)
Length L/Diameter D (mm)	D=370mm
Width W (mm)	W=40mm
Height H (mm)	H=40mm
Current/Power	High-Power
Luminous Flux	4140lm
Power consumption	34W
Suspension	Rod susp. (Set)
Ceiling rose colour	Ceiling rose: Matching luminaire`s surface colour
Pendant length (mm)	Pendant length on request
Degree of protection	IP20
LED lifetime	L80B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 40 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	4kg

